




TECHNICAL SHEET




4" - 5" - 6"
FOUR-WAY VALVES

Description / Dimensions

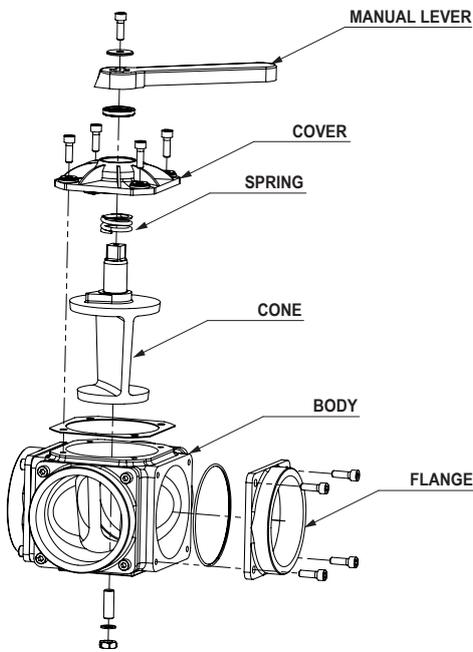

FOUR-WAY VALVE WITH MANUAL LEVER

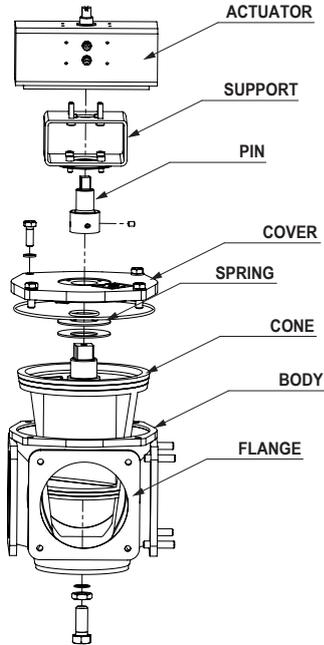


FOUR-WAY VALVE WITH PNEUMATIC ACTUATOR

FOUR-WAY VALVES

4" four-way valves without greasing point

Cast iron 4" four-way valves with manual lever action and adjustable cone recovery system to eliminate any leakage. No greasing point for vacuum pumps application with 4" GAS/NPT thread.


4" FOUR-WAY VALVES WITHOUT GREASING POINT

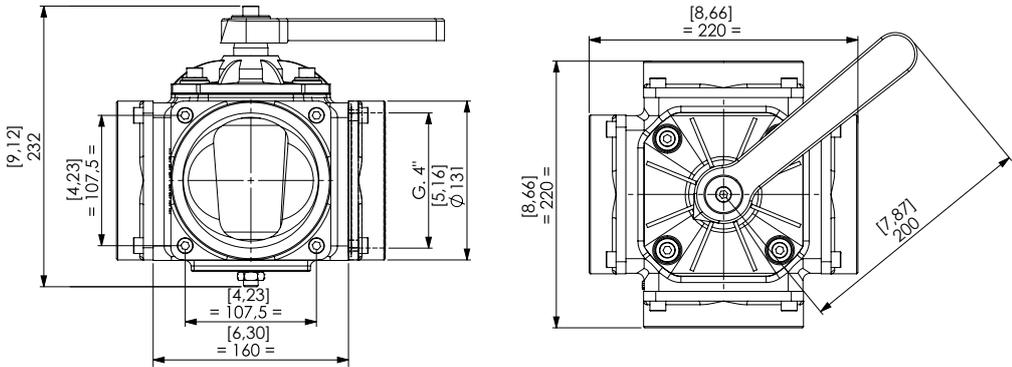

5" four-way valves without greasing point

Cast iron 5" four-way valves with manual lever action and adjustable cone recovery system to eliminate any leakage. No greasing point for vacuum pumps application for 5" flanges.


5" FOUR-WAY VALVES WITHOUT GREASING POINT

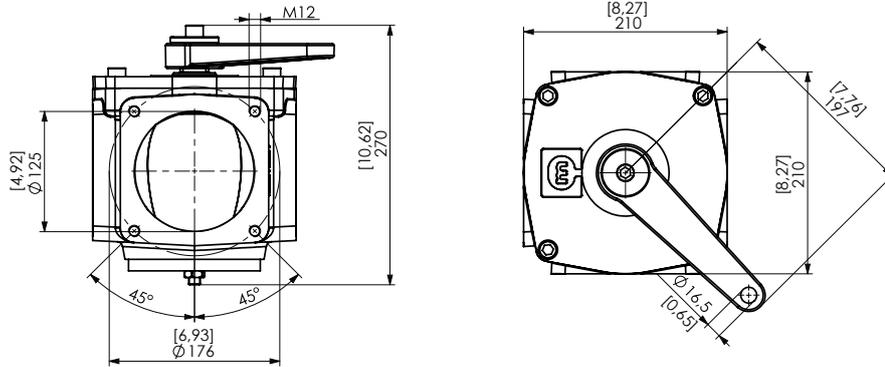

6" four-way valves without greasing point

Cast iron 6" four-way valves with manual lever action and adjustable cone recovery system to eliminate any leakage. No greasing point for vacuum pumps application for 6" flanges.


6" FOUR-WAY VALVES WITHOUT GREASING POINT

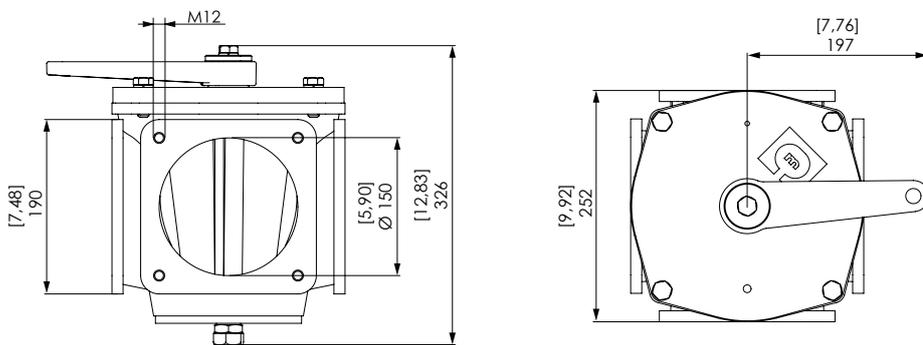

5" four-way valves with greasing point

Cast iron 5" four-way valves with manual lever action and adjustable cone recovery system to eliminate any leakage. With greasing point for industrial and oil lines application for 5" flanges.


5" FOUR-WAY VALVES WITH GREASING POINT

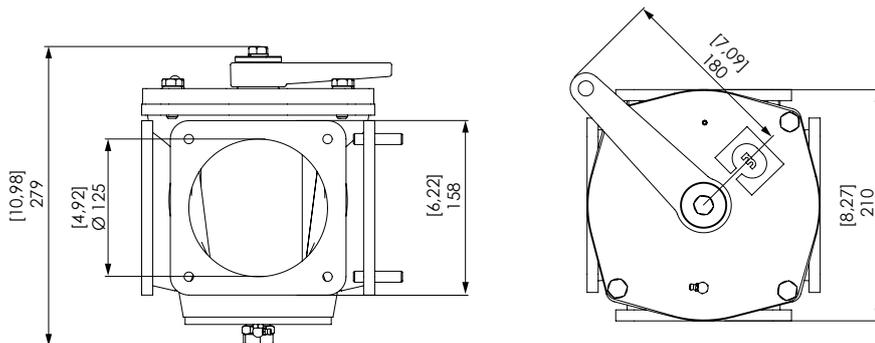

6" four-way valves with greasing point

Cast iron 6" four-way valves with manual lever action and adjustable cone recovery system to eliminate any leakage. With greasing point for industrial and oil lines application for 6" flanges.


6" FOUR-WAY VALVES WITH GREASING POINT

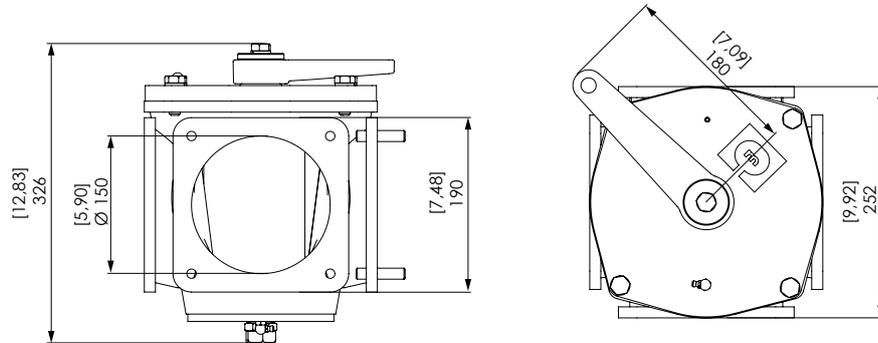

4" four-way valves with pneumatic actuator

Cast iron 4" four-way valves with pneumatic actuator action and adjustable cone recovery system to eliminate any leakage. No greasing point for vacuum pumps application with 4" GAS/NPT thread.


4" FOUR-WAY VALVES WITH PNEUMATIC ACTUATOR

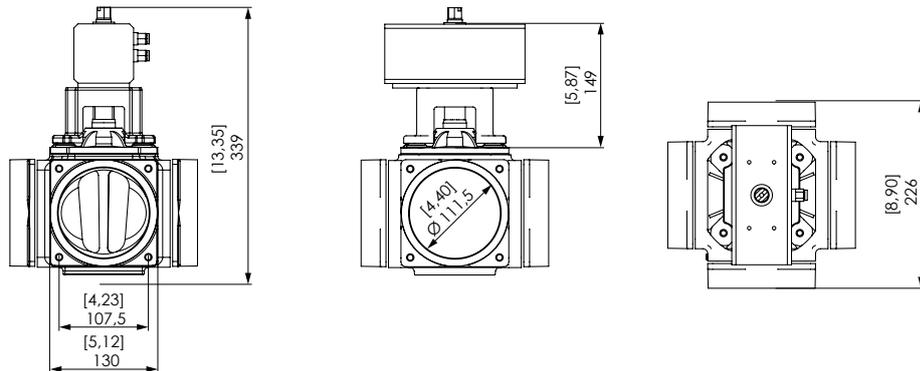

6" four-way valves with pneumatic actuator

Cast iron 6" four-way valves with pneumatic actuator action and adjustable cone recovery system to eliminate any leakage. No greasing point for vacuum pumps application for 6" flanges.

6" FOUR-WAY VALVES WITH PNEUMATIC ACTUATOR

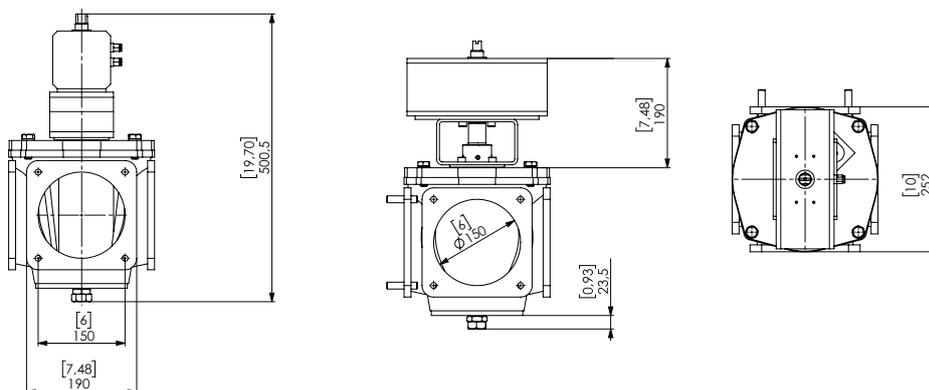

Technical data


Materials	Cast iron
Project relative pressure	-1 / +4 bar
Max pneumatic pressure	8 bar

Versions

description	code	weight
4" Four-way valve without greasing point	6.422200050-2 (GAS) 6.422200020-2 (NPT)	15 kg
5" Four-way valve without greasing point	6.1009187-5-2	24 kg
6" Four-way valve without greasing point	6.422200000-2	36 kg
5" Four-way valve with greasing point	6.422200010-1	24 kg
6" Four-way valve with greasing point	45532000001	32 kg
4" Four-way valve with pneumatic actuator	6.422200020-1 (GAS) 6.422200030-1 (NPT)	18 kg
6" Four-way valve with pneumatic actuator	42903500002	43 kg

Examples of application

FOUR-WAY VALVES WITH MANUAL LEVER

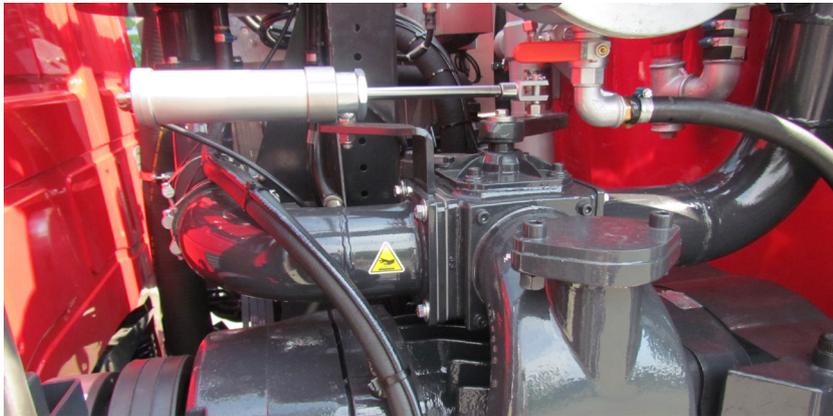

FOUR-WAY VALVES WITH PNEUMATIC ACTUATOR





MORO KAISER **COMPONENTS**

MORO KAISER S.R.L.

Via Pontebbana, 16
33080 FIUME VENETO (PN) ITALY

Tel. 0434 951.211

Fax: 0434 957.786

infomoro@morokaiser.it